



1		2		3		4		5		6		7		8	
REVISIONS												HT-E3001			
ISS	ZONE	DESCRIPTION\PER REQUEST\DATE													

RoHS COMPLIANT

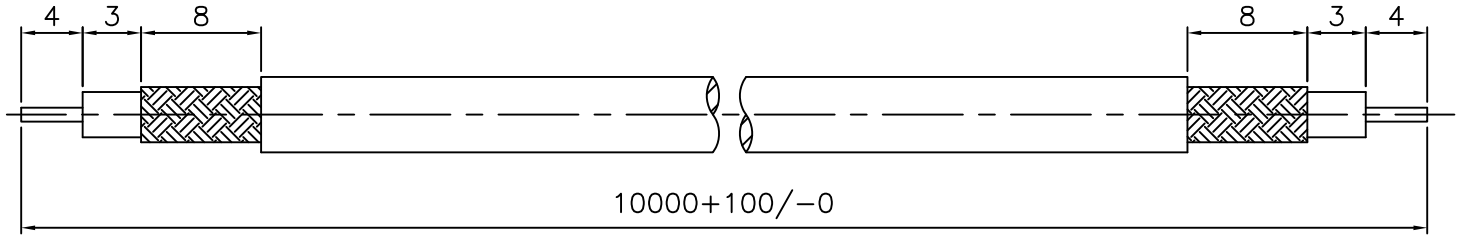

RECOMMENDED
CABLE STRIPPING DIM'S
(建議剝線尺寸)

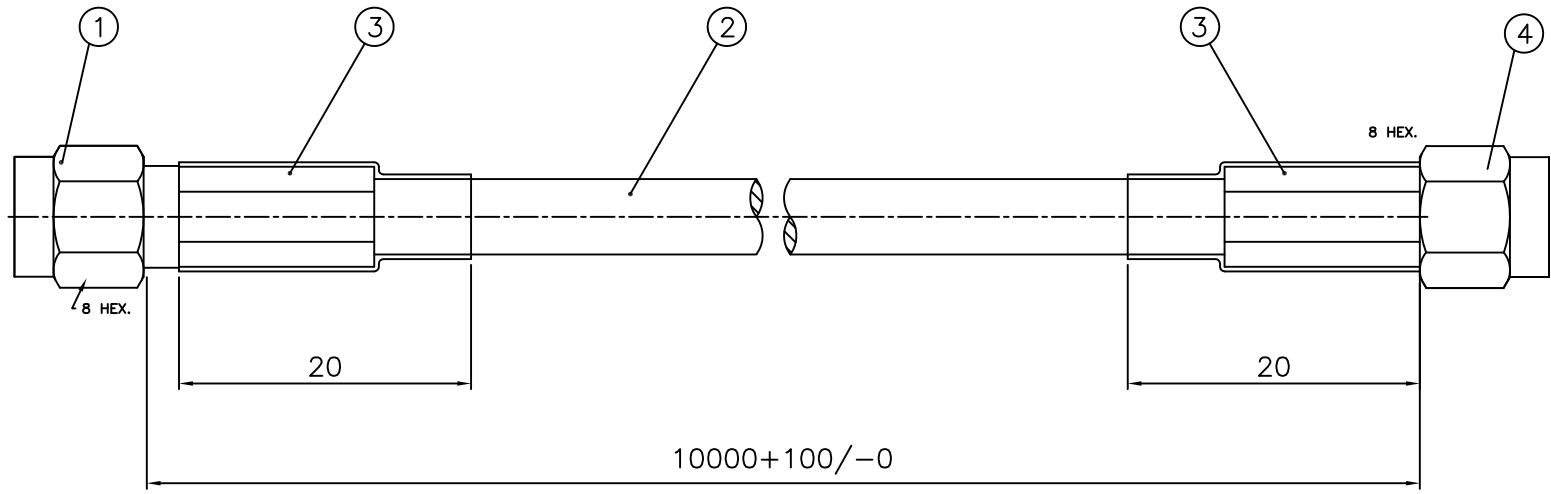

4	CONNECTOR	BRASS	GOLD	1	096111AB58025F
3	HEAT SHRINK TUBING (ø6)		White	2	203-3207-00000 L=20
2	RG-58/U		White	1	813-1101-05803
1	CONNECTOR	BRASS	GOLD	1	091111AB58025F
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.

DIMENSIONS ARE IN MILLIMETERS
UNLESS OTHERWISE SPECIFIED
TOLERANCES
ANGLES = ±3°
UP TO 6 = ±0.12
6-40 = ±0.2
40-120 = ±0.6
120-315 = ±1
ABOVE 315 = ±1.6

APPROVED	DATE	05-13-10'
CHECKED	DATE	05-13-10'
DRAWN	DATE	05-13-10'
CUSTOMER CODE	00410	
SCALE	2/1	
FILE NO. N:\CAD\CB\TNC1\TNC1\G058\015F-0		

百展科技有限公司		
TITLE CABLE ASS'Y(SMA STR PLUG TO SMA STR PLUG RG58/U)		
DRAWING NO.	CBSMA4SMA9G020015F	REV 0
CUSTOMER NO.		REV A0